

Westech Solar module

380Wp


Technical Data

Module	380Wp / 4109-4
Cells per module	120
Bypass diodes	3
Module size	1755 x 1038 x 30mm
Weight	19.5kg
Power tolerance	-0W/+5W
Nominal Power STC*	380Wp
Nominal voltage STC*	34.5V
Nominal current STC*	11.01A
NOCT**	45 +/-2°C
Voltage Temperature coefficient	-0,30%/°C
Current Temperature coefficient	+0,06%/°C
Power Temperature coefficient	-0,37%/°C
Open circuit Voltage Voc STC	41.7V
Short circuit current Isc STC	11.55A
Conversion efficiency STC	20.86%
Operating temperature	-40°C bis +85°C
Max. system voltage	1500VDC
Max. Wind/Snow Load	2400Pa / 5400Pa
Certificates	CE, TÜV, SGS, INMETRO, CQC, ISO 9001, ISO 14001, OHSAS 18001
Product warranty	10 years
Power warranty	till 1 year 97% till 10 years 90.7% linear till 25 years 80.2% linear

*STC = Standard Test Conditions: 25°C, 1000 W/m², AM1.5

**Nominal Operating Cell Temperature



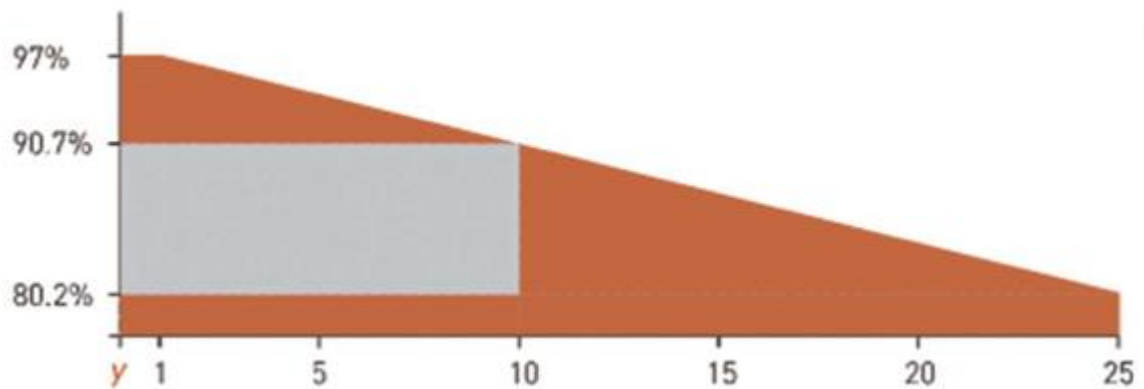

Westtech-Solar Energy GmbH

Robert-Bosch-Str. 11

85748 Garching

Germany

Tel.: +49 (0) 89-89545770

Fax: +49 (0) 89-89545771

E-Mail: info@westtech-energy.com