




Ningbo Qixin Solar Electrical Appliance Co., Ltd

No.37, Jingang Road, Binhai Industrial Park, Xiangshan County, Ningbo, China, 315700
www.nbqxsolar.com

Model (SL230TU-30P) Specifications

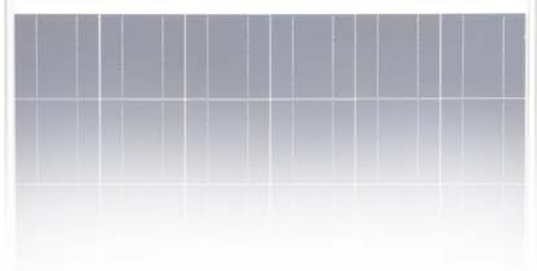

Electrical Data

Maximum Power(W)	230W
Optimum Power Voltage(Vmp)	30.36V
Optimum Operating Current(Imp)	7.58A
Open Circuit Voltage(Voc)	36.42V
Short Circuit Current(Isc)	8.11A
Cell Efficiency (%)	16.07%
Module Efficiency (%)	14.17%
Tolerance Wattage(%)	±3%
NOCT	47°C +/-2°C

Benefits

- High efficiency solar cells with high transmission and textured glass are delivering high efficiency for modules;
- Bypass diode minimizes the power drop caused by shade;
- Tempered glass, EVA resin, and weatherproof film, plus aluminum frame for extended outdoor use;
- Modules independently tested to ensure conformance with certification and regulatory standards;
- Manufacturing facility certified to ISO 9001 quality management system standards.

Temperature Coefficients

Temperature Coefficients of Isc(%)°C	+0.04
Temperature Coefficients of Voc(%)°C	-0.35
Temperature Coefficients of Pm(%)°C	-0.45
Temperature Coefficients of Im(%)°C	+0.04
Temperature Coefficients of Vm(%)°C	-0.35

Applications

- On-grid residential roof-tops
- On-grid commercial/industrial roof-tops
- Solar power stations
- Other on-grid applications





Ningbo Qixin Solar Electrical Appliance Co., Ltd

No.37, Jingang Road, Binhai Industrial Park, Xiangshan County, Ningbo, China, 315700
www.nbqxsolar.com

Model (SL230TU-30P) Specifications

Components & Mechanical Data

Solar Cell	156*156 Poly
Number of Cell(pcs)	6*10
Size of Module(mm)	1640*990*40
Front Glass Thickness(mm)	3.2
Surface Maximum Load Capacity	2400-5400Pa
Allowable Hail Load	23m/s ,7.53g
Weight Per Piece(KG)	18.6
Junction Box Type	Pass the TUV Certificate
Bypass Diode Rating(A)	12
Cable & Connector Type	Pass the TUV Certificate
Frame(Material Corners,etc.)	40#
Backing (Brand Type)	TPT
Temperature Range	-40°C to +85°C
FF (%)	70-76%
Standard Test Conditions	AM1.5 1000W/m ² 25 +/-2°C

Warranty & Certifications

Warranty	25 year limited power warranty
	10 year limited product warranty
Certifications	IEC 61215, IEC 61730

Packing

Packing	Wooden Box
1*20'	14Pallets/332pcs
1*40'HQ	28Pallets/840pcs

Engineering Drawings

